

OVAL_TUBE_SIDE_B_TP

Fitting Instructions

Steel Towel Rail
50mm x 25mm Oval Tubes

Please read these instructions and terms and conditions carefully prior to installation.
Failure to do so may invalidate the warranty.



Cod. 1468M0724

Drawings

Fig 1

This towel rail can be hung left or right-handed.


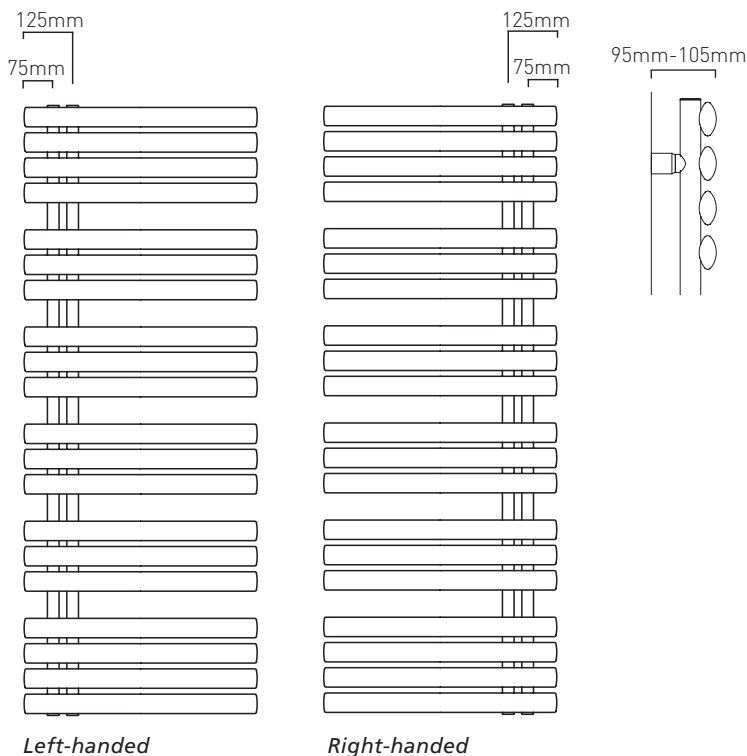


Fig 2

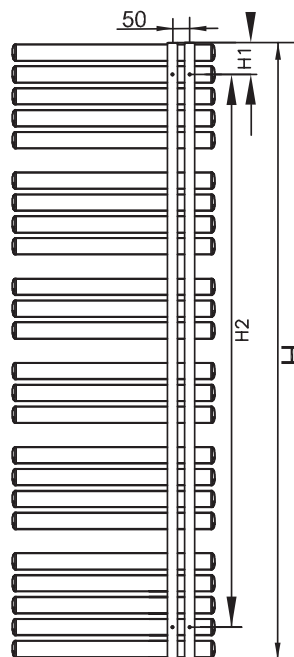

H (mm)	H1 (mm)	H2 (mm)
885+/-2	95	695
1255+/-2	95	1065
1570+/-2	95	1380
1830+/-2	95	1640

Pipe Centres

Pipe centres left to right = 50mm
 Pipe centres from wall = 57mm - 67mm
 Depth from wall = 95mm - 105mm

1. Unpack & Inspect





This product should have reached you in perfect condition. Please carefully unpack and inspect this towel rail and all fittings. Your point of purchase must be notified of any shortages or damage within 28 days of delivery.

2. Contents

You should have:

- 1 Towel Rail
- 4 Bracket Studs "B"
- 4 Bracket Sleeves "A"
- 4 Spacers "C"
- 4 Screws "D"

Accessories included

- A 4x 
- B 4x 
- C 4x 
- D 4x 

You will need:


- Electric Drill / Bits
- Tape measure
- Screwdriver
- Spanner
- Allen Key
- Spirit level

3. Preparing Towel Rail

Remove rubber protectors on the studs on the rear of the towel rail. Slide spacer "C" onto stud followed by threaded Bracket Stud "B".

PLEASE NOTE:

This needs to be hand tightened only, DO NOT USE PUMP PLIERS.

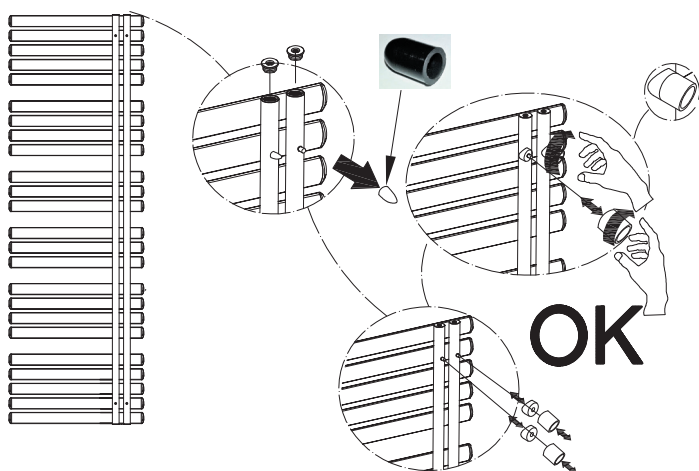

4. Installing Towel Rail


Mark position of brackets on wall. From left to right, measure width of towel rail less 75mm in from shorter side to the nearest bracket and 125mm to the furthest (see Fig 1).

From the top of required position measure 95mm down and 95mm up from the required base of the towel rail for the bottom fixing (see Fig 2).

Drill & fix the bracket sleeves and check that they are level

Lift and fit towel rail as per Fig 3 (below), and tighten grub screws "D".

Fig 3

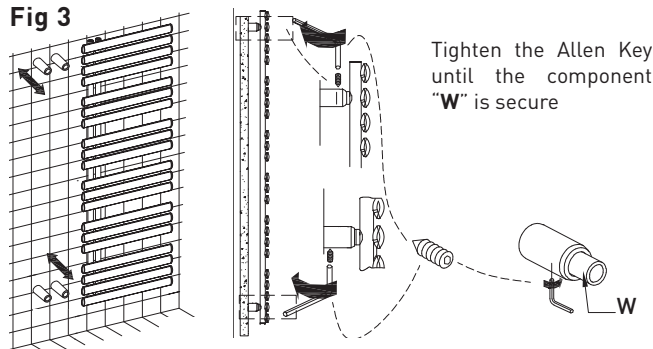

PLEASE NOTE: It is essential that all brackets are level to ensure a vertical alignment for connecting the pipework.

5. Commission

Please Note: In accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend flushing the heating system post installation of new radiators and then adding the correct quantity and type of inhibitor for use with your radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer's guarantee.

Technical Specifications

Materials	Mild Steel
Connections	½" flow and return.
Test pressure	6 Bar
Testing authority	CE/UKCA approved & certified to BS EN442
Maximum operating pressure	4 Bar
Maximum working temperature	95 °C
Packaging	Wrapped in polyethylene with cardboard box

PLEASE NOTE: Systems using micro bore pipework must have adequate pressure and flow rates for the number and style of radiators on the system

Guarantees & Liabilities

This product is guaranteed for 10 years. The guarantee is subject to the products being installed in accordance with British and or European standards as well as these fitting instructions. The guarantee in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to us.

Terms & Conditions

All products must be inspected once removed from the packaging and your point of purchase notified within 28 days of delivery of any scratches, blemishes or other damage. Your point of purchase will then agree appropriate action.

Imperfect radiators should therefore not be fitted and your point of purchase will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If your point of purchase are not notified within 28 days of the date on the signed delivery note then it will be deemed that they have fully complied with their obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims. Your point of purchase recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation, they cannot accept responsibility for items damaged after delivery.